# Cable duct - CD 40X100 - 3240294

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid
(http://phoenixcontact.com/download)

Cable duct, gray, consisting of upper and lower part, width: 40 mm, height: 100 mm, length 2000 mm

## Why buy this product

- Easy, burr-free cutting with minimum effort using the CUTFOX-CD cable duct cutter
- Thanks to its leverage and special cutting geometry, the PPS CD cable duct cutter enables easy, burr-free cutting with minimum effort
- Predetermined breaking point enables tool-free, burr-free removal of bars
- The wide, diagonal heads of the cable duct bars make it easy to fit the cover and hold it securely in place
- Installed conductors are securely held in place by means of wire retaining clips that can be snapped onto bars on the side
- Plastic body-bound rivets enable easy fixing of cable ducts using the rivet setting tool

RoHS

## Key Commercial Data

| | |
|---|---|
| Packing unit | 10 STK |
| GTIN | 4 046356 481359 |
| GTIN | 4046356481359 |
| Weight per Piece (excluding packing) | 1,400.000 g |
| Weight per piece (including packing) | 1,400.000 g |
| Custom tariff number | 39259020 |
| Country of origin | Germany |

## Technical data

### Dimensions

| | |
|---|---|
| Length (b) | 2000 mm |
| Width (a) | 40 mm |
| Height | 100 mm |
| Diameter | 40.00 mm |

### Ambient conditions

| | |
|---|---|
| Ambient temperature (operation) | -5 °C ... 60 °C |

# Cable duct - CD 40X100 - 3240294

## Technical data

### General

| | |
|---|---|
| Color | gray |
| Components | Lead-free |
| Flammability rating according to UL 94 | V0 |
| Material | PVC |
| Nominal cross section | 2633 mm² |

### Standards and Regulations

| | |
|---|---|
| Halogen-free | no |
| Connection in acc. with standard | CSA |
| Flammability rating according to UL 94 | V0 |

## Drawings

Dimensional drawing

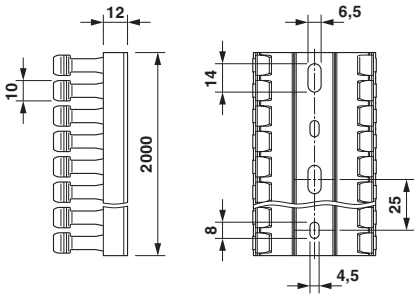


Base perforation according to DIN EN 50085

## Classifications

### eCl@ss

| | |
|---|---|
| eCl@ss 4.0 | 27140602 |
| eCl@ss 4.1 | 27140602 |
| eCl@ss 5.0 | 27140602 |
| eCl@ss 5.1 | 27140602 |
| eCl@ss 6.0 | 27400703 |
| eCl@ss 7.0 | 27400703 |
| eCl@ss 8.0 | 27400703 |
| eCl@ss 9.0 | 27400703 |

### ETIM

| | |
|---|---|
| ETIM 2.0 | EC000012 |
| ETIM 3.0 | EC000012 |
| ETIM 4.0 | EC000012 |
| ETIM 5.0 | EC000012 |
| ETIM 6.0 | EC000012 |

# Cable duct - CD 40X100 - 3240294

## Classifications

### UNSPSC

| | |
|---|---|
| UNSPSC 6.01 | 30101815 |
| UNSPSC 7.0901 | 30101815 |
| UNSPSC 11 | 30101815 |
| UNSPSC 12.01 | 30101815 |
| UNSPSC 13.2 | 39131712 |

## Approvals

### Approvals

Approvals

CSA / UL Recognized / VDE Zeichengenehmigung

Ex Approvals

### Approval details

| | | | |
|---|---|---|---|
| CSA | | | 248269 |
| UL Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | FILE E 328576 |
| VDE Zeichengenehmigung | | http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx | 40027969 |

## Accessories

### Accessories

### Cover

Cover profile - CD COVER 40 - 3240286

Cover for cable duct, gray, width: 40 mm, length: 2000 mm

# Cable duct - CD 40X100 - 3240294

## Accessories

### Filler plug

Fastening clip - RVT-PA 4 - 3240498

Plastic body-bound rivet, for hole diameter of 4 mm and a material thickness of 1.5 ... 6 mm

---

Fastening clip - RVT-PA 6 - 3240499

Plastic body-bound rivet, for hole diameter of 6 mm and a material thickness of 1.5 ... 6 mm

---

### Riveting tools

Tool - UNIFOX-RVT P 4 - 1212478

Rivet setting tool, for use with RVT-PA 4 plastic body-bound rivets

---

Tool - UNIFOX-RVT P 6 - 1212509

Rivet setting tool, for use with RVT-PA 6 plastic body-bound rivets

---

### Wiring duct

Universal wire retaining clip - CD WR - 3240284

Universal wire holding bracket, perforated, for wiring channels

---

Phoenix Contact 2017 © - all rights reserved
http://www.phoenixcontact.com